

Cod. 0365121

FLOODED LEAD ACID TRACTION BATTERY

Revision 1.0

Specifications

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate 104.00Ah
5 hour rate 80.00Ah

Weight Approx. 22.3kg

Number of cycles 70% DOD: 1200

Ref. IEC/EN 60254-1

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 14.40 to 15.00V
Coefficient -5.0mv/°C/cell
Maximum Charging Current: 23A

Case Material PP UL94HB


Terminal A (conical poles)

ENERGY WET SAFE

PLATE TYPE

Dimensions

mm

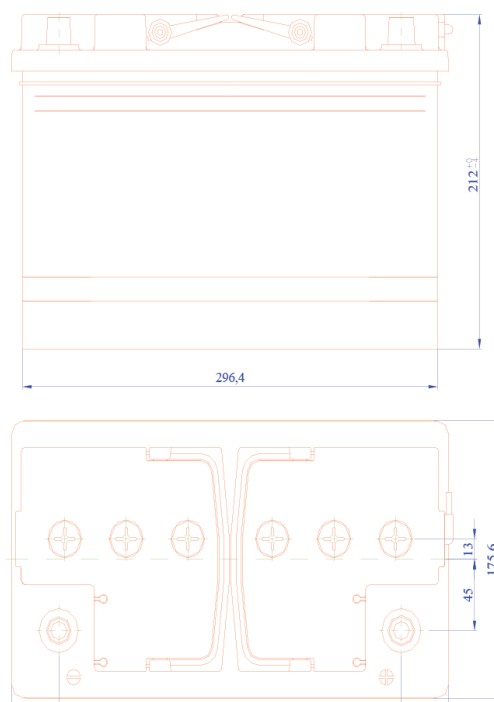

ENERGY WET SAFE

0365121

12V 104Ah C20
80Ah C5

SERIE PIANA RINFORZATA

AVVERTENZE

- Non bruciare
- Non mettere in corto circuito i terminali
- Non caricare in un contenitore chiuso
- In caso di contatto con l'elettrolito lavarsi con acqua e contattare un medico

RECYCLE

Pb

ACCU ITALIA® spa
ACCUMULATORI

Made in Italy