

Cod. 0365131

FLOODED LEAD ACID TRACTION BATTERY

Revision 1.0

Specifications

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate 135.00Ah
5 hour rate 110.00Ah

Weight Approx. 33kg

Number of cycles 70% DOD: 350/400

Ref. IEC/EN 60254-1

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 14.40 to 15.00V

Coefficient -5.0mv/°C/cell

Maximum Charging Current: 23A

Case Material PP UL94HB



Terminal A (conical poles)

ENERGY WET SAFE

PLATE TYPE

Dimensions

mm

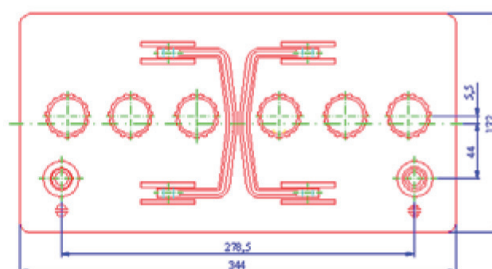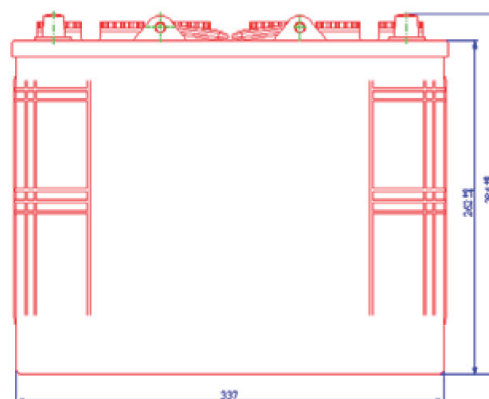

ENERGY WET SAFE

0365131

12V 135Ah C20
110Ah C5

SERIE PIANA RINFORZATA

AVVERTENZE

- Non bruciare
- Non mettere in corto circuito i terminali
- Non caricare in un contenitore chiuso
- In caso di contatto con l'elettrolito lavarsi con acqua e contattare un medico

RECYCLE

Pb

ACCU ITALIA® spa
ACCUMULATORI

Made in Italy